


TECHNICAL DATA SHEET

Eurovent PLATFORM

The Eurovent PLATFORM is a platform manufactured from galvanized steel. Designed to enable safe foot traffic on the roof slope with an angle of 15° to 60°. The product features anti-slip corrugations on the entire surface, mounted on the roof in conjunction with the adapter. Available in several colour versions painted with powder paint according to RAL chart.

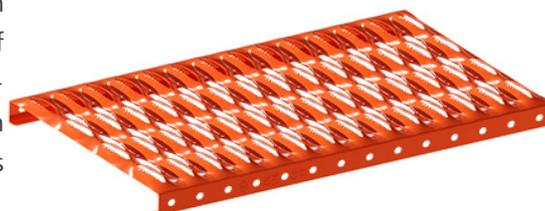

PARAMETER	UNIT	VALUE
Material		steel grade S235JR
Strength of elements	[norm]	EN 516:2007
coating thickness	[µm]	≥ 60
Corrosion protection		Hot-dip galvanized
Zinc coating thickness	[µm]	≥ 55
Non-slip surface		YES
Colour	[RAL]	Galvanized steel; wallred 8004; brown 8017; brown 8019; anthracite 7016; graphit 7024; black 9005; cherry 3004; chestnut 3009, cherry: 3011
Width	[mm]	250
Available lengths	[m]	0,4; 0,6; 0,8; 1,0; 2,0; 3,0
Package Weight	[kg]	ca. 3-23
Package	[pcs]	4

Advantages:

- Protection against corrosion
- Fast and easy installation
- For various roof coverings

* to order

Eurovent **PLATFORM**

Application:

The Eurovent PLATFORM is a platform is designed as an element of roof communication to enable foot traffic of the chimney sweeper on the chimney area. It is installed on the roofing in combination with the Eurovent[®] GRIP universal and, depending on the type of roofing, with the appropriate Eurovent[®] SUPPORT adapter. The individual elements are joined together with special screws attached to the products.

Fitting:

Mounted on the roofing in conjunction with Eurovent[®] GRIP universal brackets and depending on the type of roofing with the appropriate Eurovent[®] SUPPORT bracket. Individual elements are joined together with screws.

Storage / transport:

The product should be stored under roof in dry, damp-free rooms, protected from direct UV radiation. Product can be deformed, disfigured or suffer from damages of galvanized/paint coating if put under high pressure. Therefore it is unadvised to stack the product with other heavy products (both in storage and in transport). It is recommended to transport the product with use of covered means of transport, in manner that protects them from damage. During the transport safety regulations have to be observed. The product should be protected from chemical agents, in particular solvent-based substances, as they can reduce technical parameters of the product or permanently damage it.

The product is under warranty, providing that the guidelines included in technical data sheet are being obeyed. We reserve the right to refuse a complaint recognition in case of not following these guidelines.

Included information, advices and guidance is given based on our best knowledge, researches, experience and in good faith. We are not be held responsible for the consequences of improper or incorrect use of our products. Each user of the product shall ensure, in every possible way, including checking the end-product in given conditions, that the provided product is suitable to reach objectives he pursues.

Product information can be found on the website: www.eurovent.de

Data aktualizacji: 02/2021